

Mirage Track

Surface or suspended track mounted downlighter ideal for creating ambient and feature lighting



Mirage Track | Surface Mount | White Body | White Reflector



Mirage Track | Suspended | White Body | White Reflector



Mirage Track | Surface Mount | Black Body | Black Reflector

Overview

From elegantly lighting a reception desk in an entrance atria to providing visual interest and feature lighting in an open plan office, Mirage Track is suitable for a variety of applications. Offered in a range of outputs, with surface or suspended track mounting options, in two body colours, four reflector finishes and two lengths, Mirage Track has a variant to suit any lighting design, adding visual interest with a fantastic lit effect.

Mirage Track features circular design principles using recycled components to ensure minimal impact on the environment and offers a choice which can be upgraded throughout its lifecycle.

Available with Organic Response® options, Mirage Track integrates into any lighting design, providing an efficient solution for your space.

Lighting Performance

- Light outputs ranging from 500 lumens to 1000 lumens (nominal, 4000K Ra80)
- Efficacy - Up to 133 lm/W (4000K, Ra80)
- Precision injection moulded reflectors available in four finishes
 - Specular
 - Semi-specular
 - Black
 - White
- Narrow and medium beam distributions are ideal for feature lighting

- Light sources available
 - Colour rendition: Ra80 or Ra90
 - Colour temperature: 3000K or 4000K
- Control gear: DALI-2 as standard
- Lighting controls: Option with Organic Response® Response Radio. Note, an Organic Response® SN3 sensor will be required within the lighting scheme

For specific product variant information, including lifetime, efficacy, power, output and electrical data, please click on the individual part number under 'Order Codes' and view the datasheet


Construction

- Can be surface mounted or suspended from track
- 3 cable lengths for suspended variants (0.5m, 1m and 1.5m)
- Comes complete with DALI-2 track adaptor
- Extruded aluminium body available in two colour options, to include white (RAL 9003) or black (RAL 9005)
- Two product lengths are available; 290mm and 190mm
- Body and reflector type note:
 - Black body available with a black reflector only
 - White body available with a specular, semi-specular and white reflector
- IP20 as standard
- Graphite embedded heatsink

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM
3000K	>80	MacAdam 3 SDCM
4000K	>90	MacAdam 3 SDCM
3000K	>90	MacAdam 3 SDCM

Dimensions

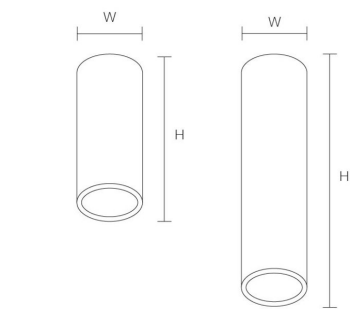

VERSION	H	Ø
Mirage Track C88 Surface	290	88
Mirage Track C88 Suspended	290	88
Mirage Track C88 Surface	190	88
Mirage Track C88 Suspended	190	88

Photometric Performance

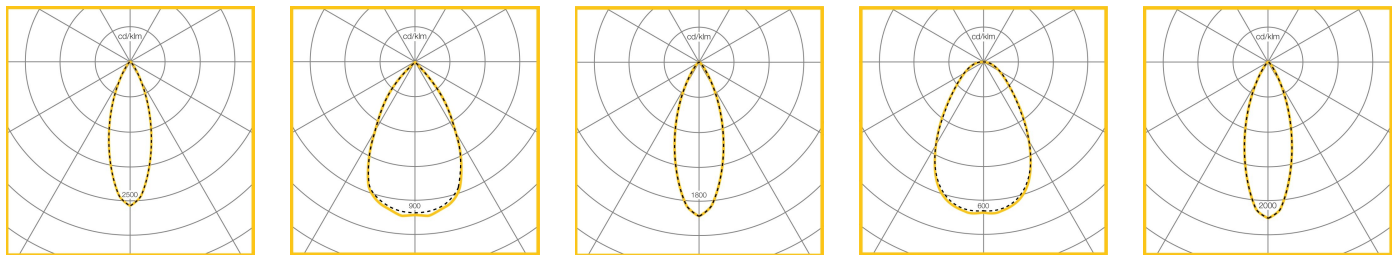


Mirage Track C88
Narrow Black
LOR = 100%

Mirage Track C88
Medium Black
LOR = 100%

Mirage Track C88
Narrow White
LOR = 100%

Mirage Track C88
Medium White
LOR = 100%

Mirage Track C88
Narrow Semi-Specular
LOR = 100%

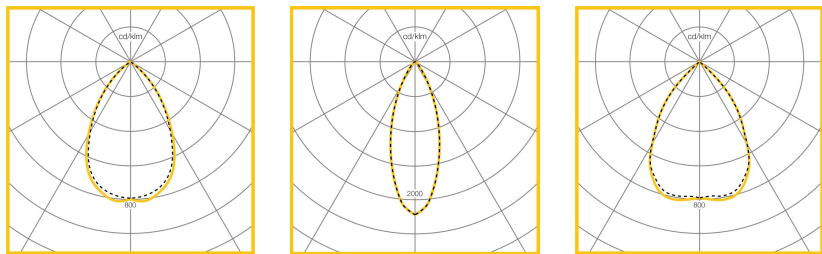

Mirage Track C88
Medium Semi-Specular
LOR = 100%

Mirage Track C88
Narrow Specular
LOR = 100%

Mirage Track C88
Medium Specular
LOR = 100%

To Specify

Track mounted premium downlighter available in two body colours with four reflector types. Graphite heatsink for optimum thermal management and superior optics designed for maximum visual comfort. A modern aesthetic, designed to offer visual interest in any lighting scheme - As Whitecroft Lighting MIRAGE TRACK
