

Pathfinder 2 Exit Sign Feature



Wall mounted, recessed, surface or suspended Exit sign for 24V DC Pathfinder 2 central battery system



Recessed Exit



Wall mounted Exit

Optics

- Dedicated LED emergency Exit sign for Pathfinder 2 system
- Maintained as standard
- Can be configured as switched maintained, dimmed or non-maintained
- Attractive, low energy solution

Body

- Flame retardant ABS white body
- Wall mounted, surface and suspended bodies
- Recessed option using surface or suspended body with additional recessing frame
- Suspended wire drops adjustable between 15mm to 1000mm from body to legend panel
- Input voltage 24V DC
- Supplied complete with driver
- 1.8W total power, 320mA output current
- Full set of legend panels supplied with 'up', 'down' and 'left/right' pictograms
- Legends supplied in accordance with BS 5266-1 (ISO7010)
- Legends have a viewing distance of up to 30m

Note: Pathfinder 2 LED luminaires can only be used as part of a Pathfinder system


Order codes

Description	Order Code
Suspended with legends	PFD2EPM30
Surface/Wall with legends	PFD2EESM30

Accessories

Description	Order Code
Recessing frame	EEM30R

Dimensions

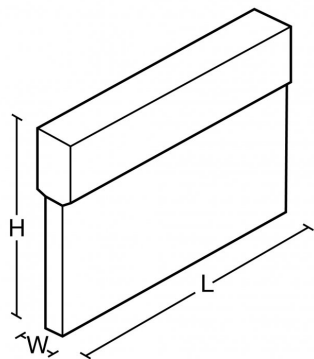

VERSION	L	W	H	KG(EM)	Cut Aperture
Exit Sign	330	45	250	2.5	
Recessing Frame	388	80	60	0.5	372x55

To Specify

Dedicated feature LED emergency Exit sign for 24V DC central battery, central test emergency lighting system. Fully addressable emergency lighting points. Control unit with programmable interface – as Whitecroft Lighting PATHFINDER 2
