SPECIFICATION

Lamp type LED

Finish Powder Coated Graphite Grey Ral 7024

Materials Die cast aluminium, glass.

Weight Midi = 7.5kg Maxi = 10.6kg

Supply 220-240V AC, 50/60Hz

Output Midi - 4571lm, 5099lm, 9141lm, 9926lm, 13,712lm, 15,246lm

Maxi - 19,080lm, 24627lm, 29348lm, 33,856lm


Operating temp 0-25C°

Connection 0.75 mm² to 2.5mm² stranded/solid core input terminal block

Ingress protection IP66

Electrical Class 2

DIMENSIONS

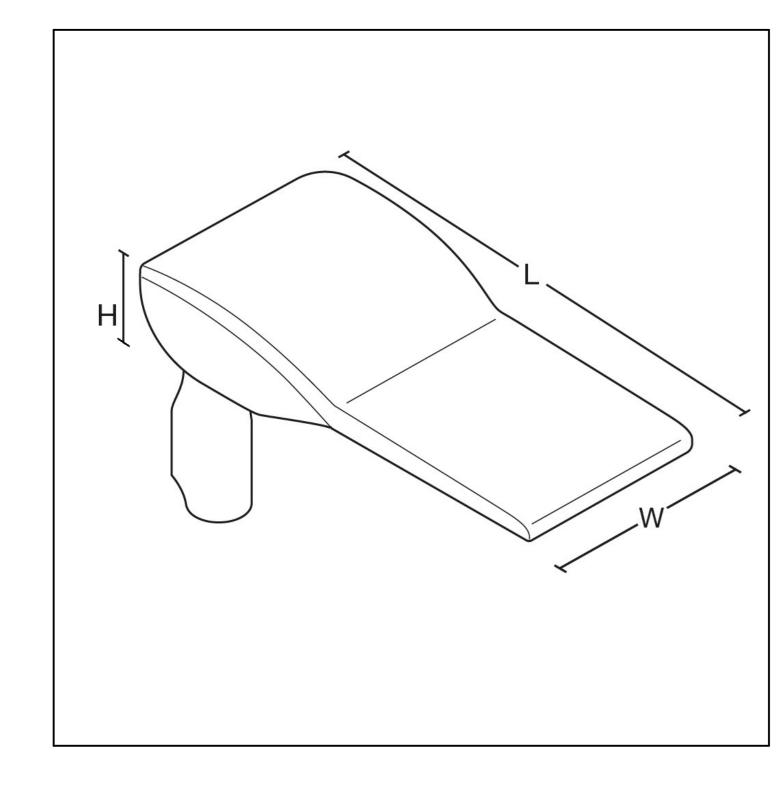

	L	W	Н
MIDI	588	293	115
MAXI	758	355	121

GENERAL INFORMATION

- 1) A qualified electrician, in accordance with IEE wiring regulations should carry out connection to mains wiring.
- 2) Ensure that the rated voltage and frequency requirements are compatible with the available mains supply.
- 3) Cleaning of reflectors and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid
- 4) Do not carry out high voltage insulation test, i.e. 500/1000v this may damage internal components.
- 5) The light source contained in this luminaire shall only be replaced by the manufacturer or a designated service agent or a suitably qualified person.

TECHNICAL SUPPORT

Telephone: 0161 330 6811

Email: technical@whitecroftlight.com http://whitecroftlighting.com/




SIROCCO MIDI SIROCCO MAXI



Installation Instructions

PK/LEAF/SIRMIDMAX

Jun 2021 - Rev 1

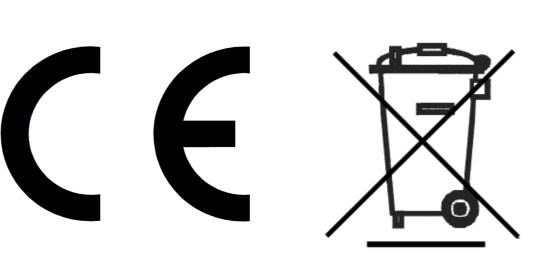

Whitecroft Lighting Limited

Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX
Telephone +44 (0)161 330 6811 Facsimile: +44 (0)161 331 5855
Registered No. 3848973 England Registered Office: As above

