

# Trimpak T5

T5 fluorescent batten range

Whitecroft  
lighting



IP20



Single Lamp Option



COM6 Sensor

## Optics

- Lamp options:
  - 1 or 2 x 28/35/49/54/80W T5

## Body

- Steel batten finished white
- BESA fixings on body section
- RAL Colour: Wire Guard White RAL9016.
- Command 6 sensor available

## Order codes

### Trimpak


Trimpak	HF Gear	3hr Emergency	LL/CW
T5 1 x 28W	TPH128	TPH128EM	81
T5 2 x 28W	TPH228	TPH228EM	79
T5 1 x 35W	TPH135	TPH135EM	82
T5 2 x 35W	TPH235	TPH235EM	80
T5 1 x 49W	TPH149	TPH149EM	75
T5 2 x 49W	TPH249	TPH249EM	74
T5 1 x 54W	TPH154	TPH154EM	71
T5 2 x 54W	TPH254	TPH254EM	70
T5 1 x 80W	TPH180	TPH180EM	70
T5 2 x 80W	TPH280	TPH280EM	70

### Options

COMEPS	Add suffix /EP	i.e TPH128/EP
COMMAND 6*	Add Q6 before H	i.e TPQ6H128
COMMAND 6 DALI*	Replace H with Q6Y	i.e TPQ6Y128
DALI DIMMING	Replace H with Y	i.e TPY128
SWITCH DIM	Replace H with X	i.e TPX128

\* Command 6 sensor not compatible with Trimpak wire guard or diffuser attachments.  
Refer to Technical Desk.


## Dimensions

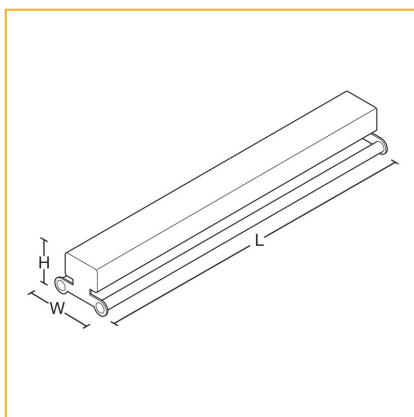


	L	W	H	KG	KG(EM)
Twin T5	1221	101	87	2.3	3.3
Twin T5	1524	101	87	3	4
Single T5	1221	58	88	2.2	3.2
Single T5	1524	58	88	2.3	3.3

BESA fixing centres at 600mm on all products

## Photometric Performance




1 x 35W T5  
LOR = 96.0%  
SHR MAX = 1.85



2 x 35W T5  
LOR = 93.0%  
SHR MAX = 1.75

## Performance Guide



Lamps	2 x 28W T5
Illuminance	320 lux
Spacing	3.0m x 3.0m
Maintenance	0.8
Reflectance	70/50/20
Ceiling Height	6.0m
Working plane	0.0m

## To Specify

Fluorescent batten with rigid section body and clip on cover. Twist locking lamp holders for quick and easy installation - as  
Whitecroft Lighting TRIMPAK

---