

centurion 265

Exterior: IP65 Wall or ceiling bulkhead

APPLICATION

To produce a flexible range of surface or semi recessed bulkhead luminaires utilising compact fluorescent lamps.


- Surface or semi-recessed mounting
- Corridors
- Stairwells
- Public areas
- Emergency exit routes
- Pedestrian access

SPECIFICATION

- Lamps Options:
 - 18W TC-D
 - 26W TC-D
- Die cast aluminium housing
- Injection moulded opal polycarbonate diffuser UV stabilised to prevent yellowing
- Polyester powder coat finish in Black (RAL 9005) or Silver (RAL 9006)
- Two cable entry glands: 7.5mm – 13.5mm
- Silicon rubber gasket and captive stainless steel fixing screws
- IP65 ingress protection
- Integral switchstart control gear
- 2 pin lamp supplied with all standard luminaires, 4 pin lamp supplied with all emergency versions

Options

-  Easytest – integral self test version available see page 181



CENS18SB – Smooth




CENS18GS – Grill

PHOTOMETRY

Centurion 265 1 x 26W TC-D Lamp




• LOR = 24%



UTILISATION FACTORS UF(F)										SHR NOM 2.50	
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	N/A	0.12	0.13	0.15	0.16	0.17	0.18	0.19
0.50	0.30	0.20	0.05	0.07	0.08	0.09	0.10	0.12	0.12	0.14	0.15
0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.07

DIMENSIONS

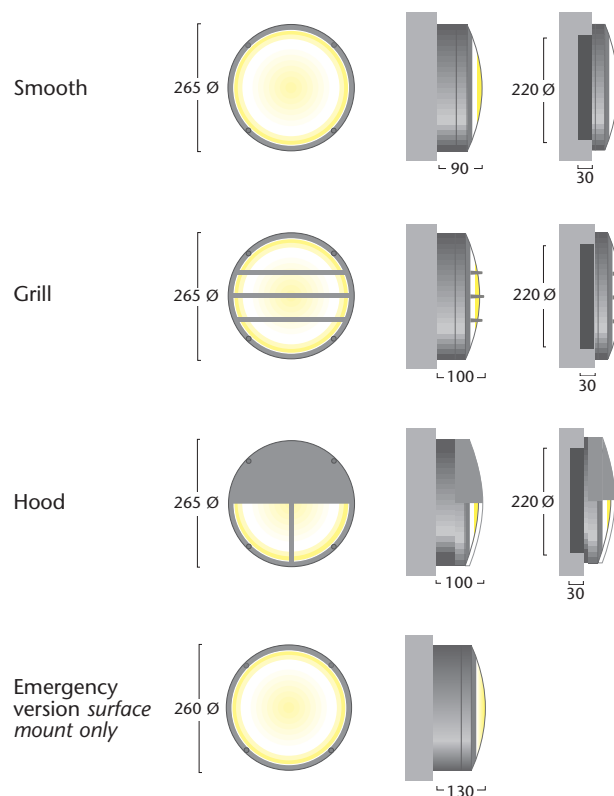

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1 x 18W TC-D	1200	12,000
1 x 26W TC-D	1800	12,000

ORDER CODES – CENTURION 265

IP65 WALL OR CEILING MOUNTED BULKHEAD

FRONT	LAMP SUPPLIED	COLOUR	SURFACE MOUNTED	SEMI RECESSED
	1 x 18W TC-D	Black	CENS18SB	CENR18SB
	1 x 26W TC-D		CENS26SB	CENR26SB
	1 x 18W TC-D		CENS18GB	CENR18GB
	1 x 26W TC-D		CENS26GB	CENR26GB
	1 x 18W TC-D		CENS18HB	CENR18HB
	1 x 26W TC-D		CENS26HB	CENR26HB

COLOUR OPTIONS For Silver version substitute B for S in the order code above

S Silver, i.e. CENS18GS

EMERGENCY Add suffix after colour suffix on order codes above

EM Integral 3 hour maintained emergency –
Surface mounted options only, i.e. CENS18SBEM

EASYTEST Add suffix to order code above

/ET Integral self autotest, i.e. CENS282DSB/ET

To specify state:
Circular surface or semi-recessed cast aluminium bulkhead with 18/26W TC-D lamp.
Smooth/grill/hood front design. Opal polycarbonate diffuser. IP65 – as Whitecroft
Lighting CENTURION 265