

Vespère Wall Mounted

MOTIVATION

A wall mounted luminaire for compact fluorescent lamps designed to complement the aesthetics of the recessed direct/indirect luminaire of the same name. See page 54.

APPLICATION

- Feature lighting
- Stairwells
- Corridors
- Reception areas
- Interior walkways
- Public areas
- Toilets

SPECIFICATION

- Lamp options:
 - 2 x 36W TC-L
- Body:
 - Fabricated steel
 - White polyester powder paint finish
 - Curved panel fabricated perforated steel
- Wall mounting
- IP20 protection
- Slim design: 98mm protrusion from wall
- High frequency control gear
- 3 hour integral maintained emergency option
- Supplied less lamps


Options

-  Easytest – integral self test version available see page 106


Vespère
WALL MOUNTED
2 x 36W TC-L Lamps




- SHR MAX = 1.21
- DLOR = 0.207
- ULOR = 0.201



UTILISATION FACTORS UF(F)												
Room Reflectance Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.15	0.18	0.20	0.22	0.25	0.27	0.29	0.31	0.32	
0.50	0.30	0.20	0.09	0.12	0.14	0.16	0.18	0.20	0.22	0.24	0.25	
0.00	0.00	0.00	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.12	0.13	



For Vespère recessed see p54

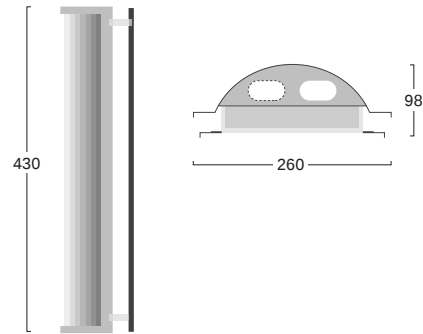

Vespère Wall Mounted

ORDER CODES

ARCHITECTURAL FLUORESCENT WALL LIGHT

STANDARD	SUPPLIED LESS LAMP	GEAR
VVMH236	2 x 36W TC-L	High frequency

EMERGENCY Add suffix to order codes above

EMIN	3 hour maintained fully integral emergency
------	--

EASYTEST OPTION Add suffix to order codes above

/ET	Integral self autotest i.e. VVMH236EMIN/ET
-----	--