


Photometry

Vivant™


LIFT PROFILER
2 x 24W T5 lamps

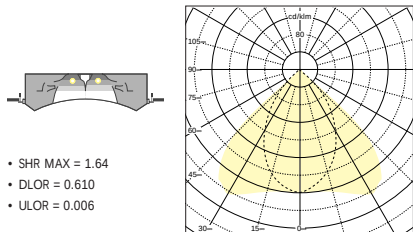

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.41	0.47	0.51	0.54	0.58	0.60	0.62	0.64	0.66			
0.50	0.30	0.20	0.36	0.43	0.47	0.50	0.54	0.56	0.58	0.60	0.62			
0.00	0.00	0.00	0.32	0.38	0.42	0.45	0.48	0.51	0.52	0.54	0.56			

Vivant™


BLEND PROFILER
2 x 55W TCL lamps

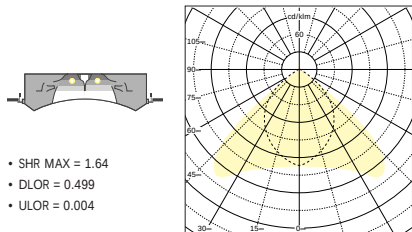

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.30	0.36	0.40	0.42	0.46	0.48	0.50	0.52	0.53			
0.50	0.30	0.20	0.26	0.32	0.36	0.38	0.42	0.44	0.46	0.48	0.50			
0.00	0.00	0.00	0.23	0.28	0.32	0.34	0.38	0.40	0.41	0.43	0.44			

Javelin Recessed range


LG3 CAT 2 200 Cd/M²
3 x 14W T5 Lamps

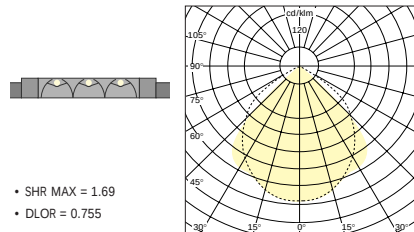

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.59	0.65	0.69	0.72	0.75	0.78	0.79	0.81	0.83			
0.50	0.30	0.20	0.58	0.63	0.67	0.70	0.73	0.75	0.77	0.78	0.79			
0.00	0.00	0.00	0.50	0.55	0.59	0.62	0.65	0.67	0.69	0.70	0.71			

Javelin Recessed range


LG3 CAT 2 500 Cd/M²
3 x 14W T5 Lamps

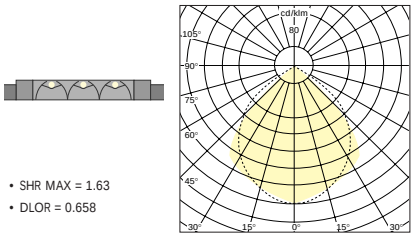

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.51	0.56	0.60	0.62	0.66	0.68	0.69	0.71	0.72			
0.50	0.30	0.20	0.47	0.52	0.56	0.58	0.62	0.64	0.65	0.67	0.68			
0.00	0.00	0.00	0.43	0.48	0.51	0.54	0.57	0.58	0.60	0.61	0.62			

Javelin Recessed range


LG3 CAT 2 200 Cd/M²
4 x 14W T5 Lamps

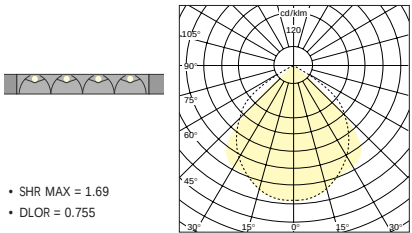

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.59	0.65	0.69	0.72	0.75	0.78	0.79	0.81	0.83			
0.50	0.30	0.20	0.58	0.63	0.67	0.70	0.73	0.75	0.77	0.78	0.79			
0.00	0.00	0.00	0.50	0.55	0.59	0.62	0.65	0.67	0.69	0.70	0.71			

Spear Recessed range


LG3 CAT 2 200 Cd/M²
3 x 14W T5 Lamps

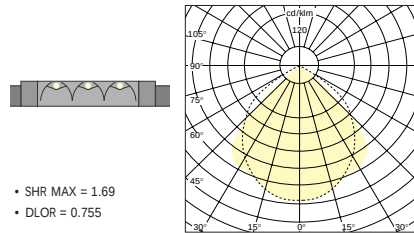

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.59	0.65	0.69	0.72	0.75	0.78	0.79	0.81	0.83			
0.50	0.30	0.20	0.58	0.63	0.67	0.70	0.73	0.75	0.77	0.78	0.79			
0.00	0.00	0.00	0.50	0.55	0.59	0.62	0.65	0.67	0.69	0.70	0.71			

Spear Recessed range


LG3 CAT 2 500 Cd/M²
3 x 14W T5 Lamps

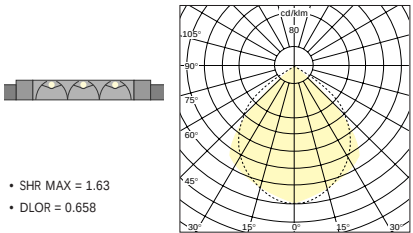

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.51	0.56	0.60	0.62	0.66	0.68	0.69	0.71	0.72			
0.50	0.30	0.20	0.47	0.52	0.56	0.58	0.62	0.64	0.65	0.67	0.68			
0.00	0.00	0.00	0.43	0.48	0.51	0.54	0.57	0.58	0.60	0.61	0.62			

Spear Recessed range


LG3 CAT 2 200 Cd/M²
4 x 14W T5 Lamps

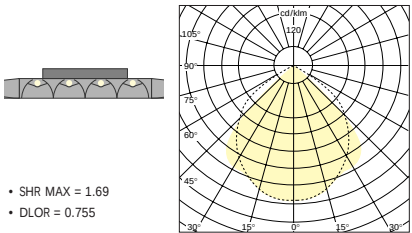

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.59	0.65	0.69	0.72	0.75	0.78	0.79	0.81	0.83			
0.50	0.30	0.20	0.58	0.63	0.67	0.70	0.73	0.75	0.77	0.78	0.79			
0.00	0.00	0.00	0.50	0.55	0.59	0.62	0.65	0.67	0.69	0.70	0.71			

Softlighter

RECESSED 600 x 600 SEMI-SPECULAR LG3 CAT 2
4 x 18W T8 Lamps

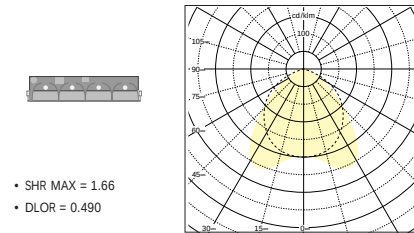

UTILISATION FACTORS UF(F)		SHR NOM=1.50												
Room Reflectance		Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00			
0.70	0.50	0.20	0.40	0.43	0.46	0.47	0.49	0.51	0.52	0.53	0.54			
0.50	0.30	0.20	0.37	0.40	0.43	0.44	0.47	0.48	0.49	0.50	0.51			
0.00	0.00	0.00	0.34	0.37	0.40	0.41	0.43	0.44	0.45	0.46	0.47			