



Photometry

Vista Suspended

LG3 CAT 2 100:0
1 x 58W T8 Lamp



- SHR MAX = 1.76
- DLOR = 0.607
- ULOR = 0.00




UTILISATION FACTORS UF(F)											SHR NOM=1.75
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.56	0.59	0.60	0.63	0.64	0.65	0.66	0.67
0.50	0.30	0.20	N/A	0.53	0.56	0.57	0.59	0.61	0.62	0.63	0.64
0.00	0.00	0.00	N/A	0.50	0.52	0.54	0.55	0.56	0.57	0.58	0.58

CONVERSION TERMS


Lamp Length	1.2m	1.5m	1.8m
Lamp wattage	36W	58W	70W
UF and PC	1.00	1.01	1.01

Vista Suspended

LG3 CAT 2 75:25
1 x 58W T8 Lamp



- SHR MAX = 1.09
- DLOR = 0.471
- ULOR = 0.315




UTILISATION FACTORS UF(F)											SHR NOM=1.00
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.40	0.48	0.53	0.57	0.62	0.65	0.68	0.71	0.72
0.50	0.30	0.20	0.31	0.39	0.44	0.47	0.52	0.55	0.57	0.60	0.62
0.00	0.00	0.00	0.22	0.27	0.31	0.33	0.36	0.38	0.40	0.41	0.43

CONVERSION TERMS

Lamp Length	1.2m	1.5m	1.8m
Lamp wattage	36W	58W	70W
UF and PC	1.00	1.01	1.01

Ocean® Opal Glass Bowl

1 x 32W TC-T Lamp

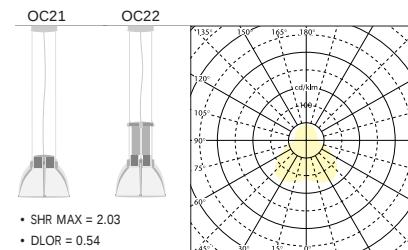

- SHR MAX = 2.03
- DLOR = 0.54
- ULOR = 0.26


UTILISATION FACTORS UF(F)											SHR NOM=2.00
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.47	0.52	0.56	0.61	0.65	0.67	0.71	0.73
0.50	0.30	0.20	N/A	0.38	0.42	0.45	0.51	0.54	0.57	0.60	0.62
0.00	0.00	0.00	N/A	0.27	0.29	0.32	0.35	0.38	0.40	0.42	0.44

CONVERSION TERMS

Lamp wattage	35/70W	150W	32/42W
UF and PC	0.91	0.95	1.00

Ocean® Aluminium Reflector

1 x 32W TC-T Lamp

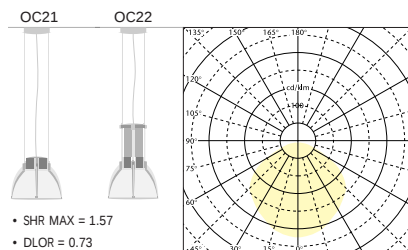

- SHR MAX = 1.57
- DLOR = 0.73
- ULOR = 0.00


UTILISATION FACTORS UF(F)											SHR NOM=1.50
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.45	0.51	0.57	0.60	0.66	0.69	0.71	0.75	0.77
0.50	0.30	0.20	0.39	0.45	0.51	0.54	0.60	0.63	0.66	0.69	0.71
0.00	0.00	0.00	0.34	0.39	0.44	0.48	0.53	0.57	0.59	0.62	0.64

CONVERSION TERMS

Lamp wattage	35/70W	150W	32/42W
UF and PC	0.91	0.95	1.00

Ocean® Opal Glass Bowl

1 x 70W CDM-T Lamp

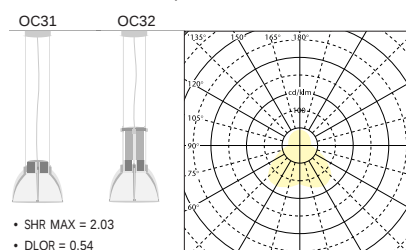

- SHR MAX = 2.03
- DLOR = 0.54
- ULOR = 0.26

UTILISATION FACTORS UF(F) SHR NOM=2.00


Room Reflectance	Room Index										
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.47	0.52	0.56	0.61	0.65	0.67	0.71	0.73
0.50	0.30	0.20	N/A	0.38	0.42	0.45	0.51	0.54	0.57	0.60	0.62
0.00	0.00	0.00	N/A	0.27	0.29	0.32	0.35	0.38	0.40	0.42	0.44

CONVERSION TERMS

Lamp wattage	70W	150W	26W
UF and PC	1.00	0.95	0.91

Ocean® Aluminium Reflector

1 x 70W CDM-T Lamp

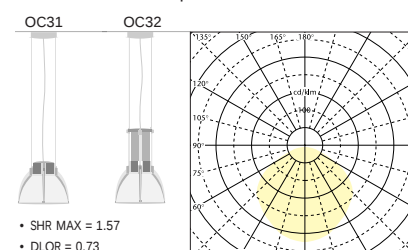

- SHR MAX = 1.57
- DLOR = 0.73
- ULOR = 0.00

• UCLOR = 0.00

UTILISATION FACTORS UF(F) SHR NOM=1.50


Room Reflectance	Room Index										
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.45	0.51	0.57	0.60	0.66	0.69	0.71	0.75	0.77
0.50	0.30	0.20	0.39	0.45	0.51	0.54	0.60	0.63	0.66	0.69	0.71
0.00	0.00	0.00	0.34	0.39	0.44	0.48	0.53	0.57	0.59	0.62	0.64

CONVERSION TERMS

Lamp wattage	70W	150W	26W
UF and PC	1.00	0.95	0.91

Ocean® Opal Glass Bowl

1 x 70W CDM-T

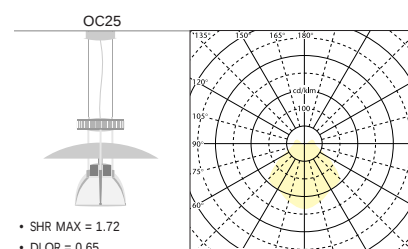

- SHR MAX = 1.72
- DLOR = 0.65
- ULOR = 0.18

UTILISATION FACTORS UF(F)											SHR NOM=1.50
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.41	0.48	0.54	0.58	0.64	0.68	0.71	0.75	0.77
0.50	0.30	0.20	0.33	0.39	0.45	0.49	0.55	0.58	0.61	0.65	0.68
0.00	0.00	0.00	0.24	0.29	0.34	0.37	0.42	0.45	0.47	0.50	0.53

CONVERSION TERMS


Lamp wattage	35/70W	32/42W
UF and PC	1.00	1.10

Ergo Small

1 x 13W TC-T Lamp



- SHR MAX = 1.401
- DLOR = 0.59




UTILISATION FACTORS UF(F)										SHR NOM=1.25	
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.36	0.43	0.47	0.50	0.54	0.57	0.59	0.61	0.63
0.50	0.30	0.20	0.32	0.38	0.42	0.45	0.49	0.52	0.54	0.57	0.59
0.00	0.00	0.00	0.27	0.33	0.37	0.40	0.44	0.47	0.49	0.51	0.53

Ergo Small

1 x 50W QT12 Lamp



- SHR MAX = 0.882
- DLOR = 0.65



UTILISATION FACTORS UF(F)											SHR NOM=0.75
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.46	0.52	0.56	0.59	0.63	0.65	0.67	0.69	0.70
0.50	0.30	0.20	0.41	0.48	0.52	0.55	0.59	0.61	0.63	0.65	0.67
0.00	0.00	0.00	0.37	0.43	0.47	0.50	0.54	0.56	0.57	0.59	0.60