


Mirage MD20 - 213S MDA20-10 Angle 68°
LG3 CAT 2 TECHNICAL LOUVRE
2 x 13W TC-D Compact fluorescent

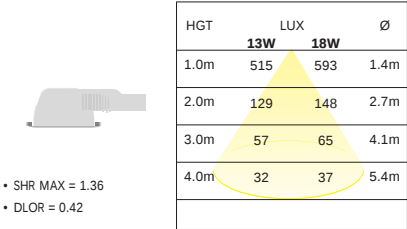


- SHR MAX = 1.36
- DLOR = 0.42

UTILISATION FACTORS UF(F)		SHR NOM 1.25									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.33	0.36	0.39	0.40	0.42	0.43	0.44	0.45	0.46
0.70	0.50	0.20	0.30	0.34	0.36	0.37	0.40	0.41	0.42	0.43	0.44
0.50	0.30	0.20	0.30	0.34	0.36	0.37	0.40	0.41	0.42	0.43	0.44
0.00	0.00	0.00	0.32	0.31	0.33	0.35	0.36	0.67	0.38	0.39	0.40

CONVERSION TERMS			
Lamp Wattage	13W	18W	
UF and PC	1.00	0.83	

Mirage MD20 - 118W Angle 80°
PLAIN WHITE REFLECTOR
1 x 18W TC-D Compact fluorescent

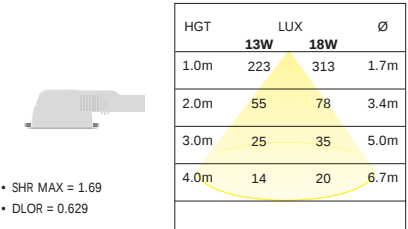


- SHR MAX = 1.69
- DLOR = 0.629

UTILISATION FACTORS UF(F)		SHR NOM 1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.43	0.48	0.52	0.55	0.59	0.61	0.63	0.65	0.67
0.50	0.30	0.20	0.38	0.43	0.47	0.50	0.54	0.57	0.59	0.61	0.63
0.00	0.00	0.00	0.34	0.38	0.42	0.45	0.49	0.51	0.53	0.55	0.57

CONVERSION TERMS			
Lamp Wattage	13W	18W	
UF and PC	0.99	1.00	

Mirage MD24 - 118S Angle 88°
LG3 CAT 3 DIAMOND FACET REFLECTOR
1 x 18W TC-D Compact fluorescent

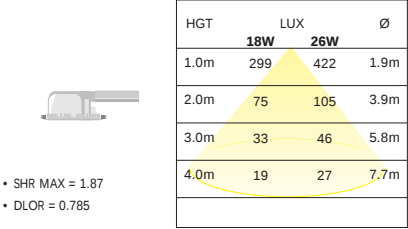


- SHR MAX = 1.87
- DLOR = 0.785

UTILISATION FACTORS UF(F)		SHR NOM 1.75									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.61	0.66	0.70	0.75	0.78	0.80	0.83	0.84
0.50	0.30	0.20	N/A	0.55	0.61	0.65	0.70	0.73	0.75	0.78	0.80
0.00	0.00	0.00	N/A	0.50	0.55	0.59	0.63	0.66	0.68	0.71	0.72

CONVERSION TERMS			
Lamp Wattage	18W	26W	
UF and PC	1.00	0.98	

Mirage MD24 - 226S Angle 82°
LG3 CAT 3 DIAMOND FACET REFLECTOR
2 x 26W TC-D Compact fluorescent

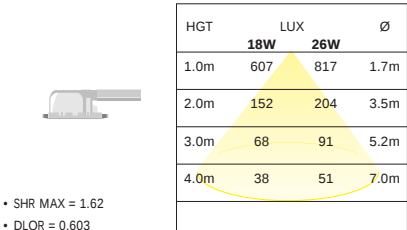


- SHR MAX = 1.62
- DLOR = 0.603

UTILISATION FACTORS UF(F)		SHR NOM 1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.41	0.46	0.51	0.54	0.57	0.60	0.61	0.63	0.65
0.50	0.30	0.20	0.36	0.42	0.46	0.49	0.53	0.56	0.57	0.60	0.61
0.00	0.00	0.00	0.32	0.38	0.42	0.45	0.48	0.50	0.52	0.54	0.55

CONVERSION TERMS			
Lamp Wattage	18W	26W	
UF and PC	0.89	1.00	

Mirage MD24 - 218S MDA24-10 Angle 72°
LG3 CAT 2 TECHNICAL LOUVRE
2 x 18W TC-D Compact fluorescent

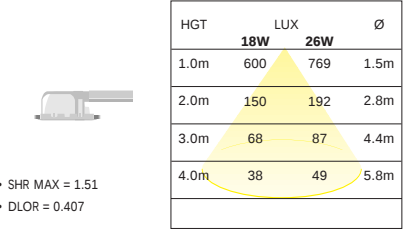


- SHR MAX = 1.51
- DLOR = 0.407

UTILISATION FACTORS UF(F)		SHR NOM 1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.34	0.37	0.39	0.40	0.42	0.43	0.43	0.44	0.45
0.50	0.30	0.20	0.32	0.34	0.36	0.38	0.39	0.40	0.41	0.42	0.43
0.00	0.00	0.00	0.30	0.32	0.34	0.35	0.36	0.37	0.38	0.39	0.39

CONVERSION TERMS			
Lamp Wattage	18W	26W	
UF and PC	1.00	0.89	


Mirage MDD24 - 218S Angle 72°
DIRECTIONAL DOWNLIGHTER
2 x 18W TC-T Compact fluorescent

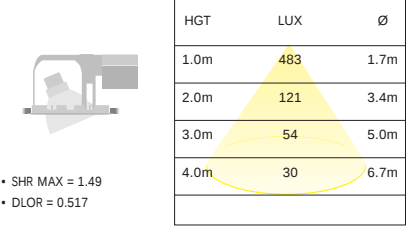

- SHR MAX = 1.49
- DLOR = 0.517

UTILISATION FACTORS UF(F)		SHR NOM 1.25									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.31	0.37	0.41	0.43	0.47	0.49	0.51	0.53	0.54
0.50	0.30	0.20	0.27	0.33	0.36	0.39	0.43	0.45	0.47	0.49	0.51
0.00	0.00	0.00	0.23	0.29	0.32	0.35	0.38	0.41	0.42	0.44	0.46


Mirage MD15 Angle 84°
LG3 CAT 3 DIAMOND FACET REFLECTOR
1 x 13W TC-D Compact fluorescent

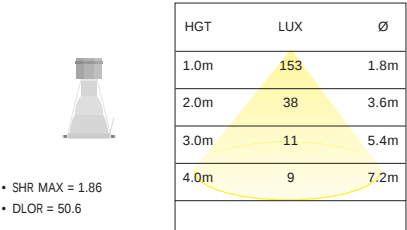

- SHR MAX = 1.86
- DLOR = 50.6

UTILISATION FACTORS UF(F)		SHR NOM 1.75									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.42	0.45	0.47	0.50	0.51	0.53	0.54	0.55
0.50	0.30	0.20	N/A	0.39	0.42	0.44	0.47	0.48	0.49	0.51	0.52
0.00	0.00	0.00	N/A	0.36	0.38	0.40	0.43	0.44	0.45	0.47	0.47

Mirage MD30 - 326SHT Angle 66°
LG3 CAT 2 TURBO LOUVRE
3 x 26W TC-D Compact fluorescent

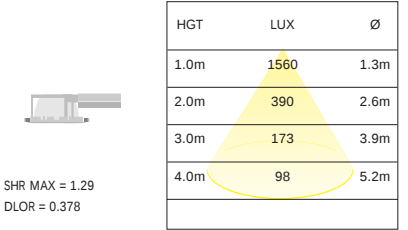

- SHR MAX = 1.29
- DLOR = 0.378

UTILISATION FACTORS UF(F)		SHR NOM 1.25									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.31	0.34	0.36	0.37	0.39	0.40	0.40	0.41	0.42
0.50	0.30	0.20	0.29	0.32	0.34	0.35	0.36	0.37	0.38	0.39	0.40
0.00	0.00	0.00	0.28	0.30	0.32	0.33	0.34	0.35	0.35	0.36	0.36