


Curie Elite

W2 LOUVRE & CLEAR POLYCARBONATE DIFFUSER
4 x 58W T8 Lamps

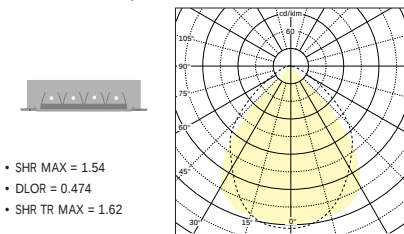


UTILISATION FACTORS UF(F)		SHR NOM=1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.39	0.42	0.44	0.46	0.48	0.49	0.50	0.51	0.52
0.50	0.30	0.20	0.36	0.39	0.42	0.43	0.45	0.47	0.47	0.49	0.49
0.00	0.00	0.00	0.34	0.37	0.39	0.40	0.42	0.43	0.44	0.45	0.45

CONVERSION TABLE FOR LAMP OPTIONS			DIFFUSER OPTIONS	
Lamp Length	1.2m	1.5m	W2/LAMG	
Lamp wattage	36W	58W	1.03	
UF and PC	0.98	1.00		

Pasteur Elite

W2 LOUVRE & CLEAR POLYCARBONATE DIFFUSER
2 x 36W T8 Lamps

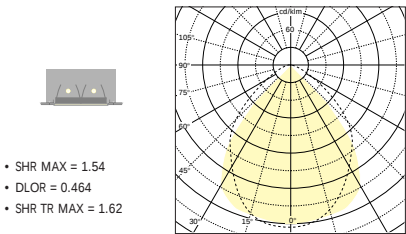


UTILISATION FACTORS UF(F)		SHR NOM=1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.38	0.41	0.43	0.45	0.47	0.48	0.49	0.50	0.51
0.50	0.30	0.20	0.35	0.38	0.41	0.42	0.44	0.46	0.46	0.48	0.48
0.00	0.00	0.00	0.33	0.36	0.38	0.39	0.41	0.42	0.43	0.44	0.44

CONVERSION TABLE FOR LAMP OPTIONS		
Lamp Length	0.6m	
Lamp wattage	18W	
UF and PC	0.98	

Pasteur Elite

W2 LOUVRE & CLEAR POLYCARBONATE DIFFUSER
4 x 36W T8 Lamps

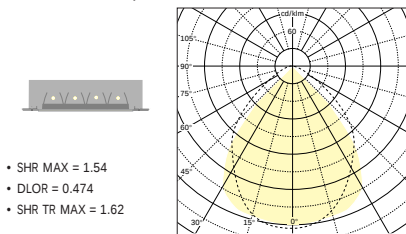


UTILISATION FACTORS UF(F)		SHR NOM=1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.38	0.41	0.43	0.45	0.47	0.48	0.49	0.50	0.51
0.50	0.30	0.20	0.35	0.38	0.41	0.42	0.44	0.46	0.46	0.48	0.48
0.00	0.00	0.00	0.33	0.36	0.38	0.39	0.41	0.42	0.43	0.44	0.44

CONVERSION TABLE FOR LAMP OPTIONS		
Lamp Length	0.6m	
Lamp wattage	18W	
UF and PC	0.98	

Jenner Elite

PRISMATIC POLYCARBONATE PRISMS UP
2 x 36W T8 Lamps

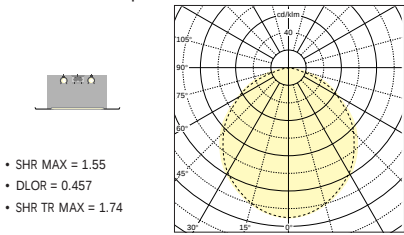


UTILISATION FACTORS UF(F)		SHR NOM=1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.28	0.32	0.35	0.38	0.41	0.43	0.44	0.46	0.48
0.50	0.30	0.20	0.24	0.28	0.31	0.34	0.37	0.39	0.41	0.43	0.44
0.00	0.00	0.00	0.21	0.24	0.28	0.30	0.33	0.35	0.37	0.69	0.40

CONVERSION TABLE FOR LAMP OPTIONS			W2/LAMG	
Lamp Length	1.2m	1.5m		
Lamp wattage	36W	58W	1.03	
UF and PC	0.98	1.00		

Jenner Elite

PRISMATIC POLYCARBONATE PRISMS UP
4 x 36W T8

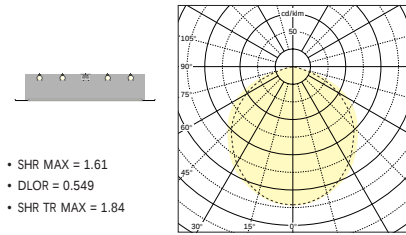


UTILISATION FACTORS UF(F)		SHR NOM=1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.33	0.38	0.42	0.45	0.48	0.51	0.53	0.55	0.57
0.50	0.30	0.20	0.28	0.33	0.37	0.40	0.44	0.47	0.49	0.51	0.53
0.00	0.00	0.00	0.24	0.28	0.32	0.35	0.39	0.42	0.43	0.46	0.48

CONVERSION TABLE FOR LAMP OPTIONS		
Lamp Length	0.6m	1.2m
Lamp wattage	18W	36W
UF and PC	0.98	1.00

DTFA, DTFN

PRISMATIC ACRYLIC PRISMS UP
2 x 36W T8 Lamps

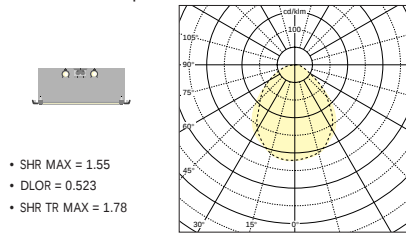

UTILISATION FACTORS UF(F)		SHR NOM=1.50									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.37	0.41	0.44	0.47	0.50	0.51	0.53	0.55	0.56
0.50	0.30	0.20	0.33	0.37	0.41	0.43	0.46	0.48	0.49	0.51	0.52
0.00	0.00	0.00	0.30	0.34	0.37	0.39	0.42	0.43	0.45	0.46	0.47


CONVERSION TABLE FOR LAMP OPTIONS		
Lamp Length	0.6m	1.2m 1.5m
Lamp wattage	18W	36W 58W
UF and PC	0.98	1.00 1.01

CONVERSION TABLE FOR DIFFUSER OPTIONS

POLYCARBONATE	
0.75	

DTFA, DTFN

PRISMATIC ACRYLIC PRISMS UP
3 x 36W T8 Lamps

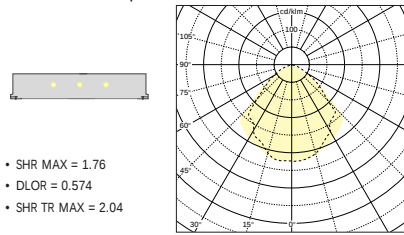

UTILISATION FACTORS UF(F)		SHR NOM=1.75									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.46	0.50	0.52	0.55	0.57	0.58	0.60	0.61
0.50	0.30	0.20	N/A	0.42	0.46	0.48	0.51	0.53	0.55	0.56	0.58
0.00	0.00	0.00	N/A	0.38	0.41	0.44	0.46	0.48	0.50	0.51	0.52


CONVERSION TABLE FOR LAMP OPTIONS		
Lamp Length	0.6m	1.2m 1.5m
Lamp wattage	18W	36W 58W
UF and PC	0.98	1.00 1.01

CONVERSION TABLE FOR DIFFUSER OPTIONS

POLYCARBONATE	
0.75	

Lister


PRISMATIC ACRYLIC PRISMS UP
2 x 36W T8 Lamps

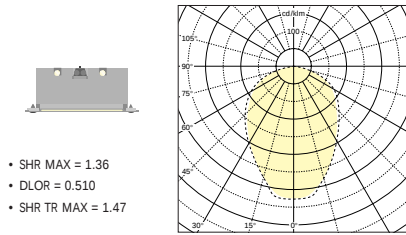

UTILISATION FACTORS UF(F)		SHR NOM=1.25									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.29	0.34	0.38	0.41	0.44	0.47	0.49	0.51	0.52
0.50	0.30	0.20	0.25	0.30	0.33	0.36	0.40	0.43	0.45	0.47	0.49
0.00	0.00	0.00	0.21	0.26	0.29	0.32	0.35	0.38	0.40	0.42	0.44

Lister

PRISMATIC ACRYLIC PRISMS UP
4 x 36W T8 Lamps

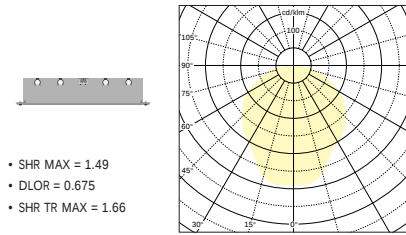

UTILISATION FACTORS UF(F)		SHR NOM=1.25									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.37	0.44	0.49	0.52	0.57	0.61	0.63	0.67	0.69
0.50	0.30	0.20	0.31	0.38	0.43	0.46	0.51	0.55	0.58	0.61	0.64
0.00	0.00	0.00	0.26	0.32	0.36	0.40	0.45	0.48	0.51	0.54	0.57

CONVERSION TABLE FOR LAMP OPTIONS		
Lamp Length	0.6m	1.2m
Lamp wattage	18W	36W
UF and PC	0.99	1.0