



# Command Professional Scene Plates

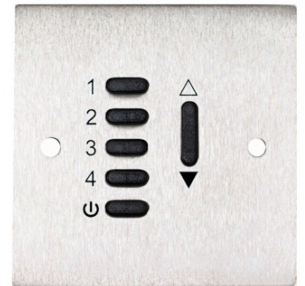

Architectural scene setting plate

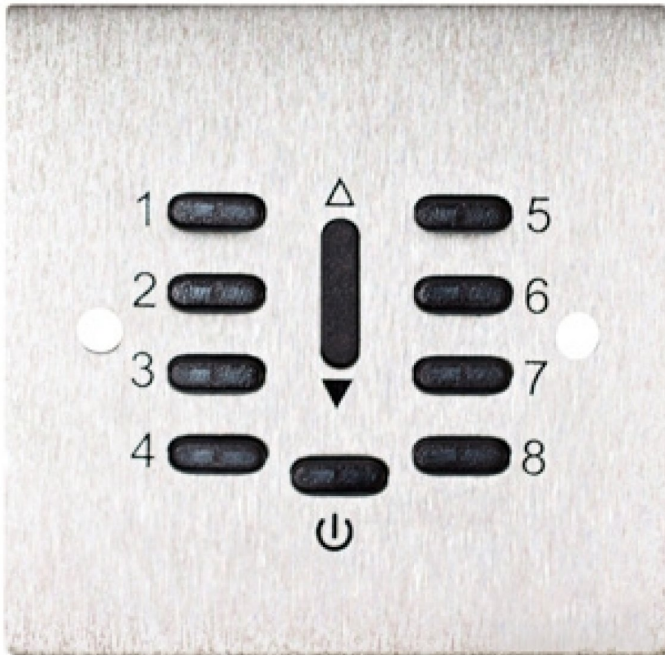

Command Professional 4 Scene Plate

## Overview

A range of DALI architectural scene setting and recall plates in a variety of configurations, recall up to eight scenes.

## Features

- Available in a variety of configurations
- Brushed stainless steel finish as standard (other finishes and colour ways available on request)
- Buttons backlit with blue LED
- Scene functionality includes raise, lower and programming
- Recall up to eight programmed scenes
- Direct connection to the Command Professional range of controllers and series hubs
- Fits a standard single gang backbox 47mm deep or greater \*

\* Supplied by others

# Specification

- Power Consumption
  - 4mA nominal consumption at 15V DALI bus voltage
- Connections
  - 2 pole screw terminal connector (for DA, DA connections)
  - Plug included
- Operating Temperature
  - 0°C to +40°C
- Operating Humidity
  - 10% - 90% non condensing
- Installation
  - Backbox must have horizontal screw mounting aperture only
  - Metallic front plate must be earthed
- Safety
  - EN 60 950
  - SELV isolation
- Conformity & Standards
  - Conformity & Standards
  - EMC immunity EN 50082-1
  - EMC emissions EN 50081-1
  - DALI & NEMA compliant
  - IEC Standard 62386-102
  - Supports DALI 2 & 3 byte protocol
- Network and Power
  - Cage clamp terminals
  - Cable cross sections from 0.5 to 1.5mm<sup>2</sup>

---

## Order codes

4 SCENE PLATE, S STEEL	COMPFSP4SS
8 SCENE PLATE, S STEEL	COMPFSP8SS

## Dimensions

VERSION	L	W	H
COMPFSP4SS	86mm	86mm	30mm
COMPFSP8SS	86mm	86mm	30mm

---

## To Specify

DALI architectural scene setting and recall plate to recall up to four or eight programmed scenes for direct connection to the Command Professional range of controllers and series hubs - as Whitecroft Lighting COMMAND PROFESSIONAL COMPFSP.