



GENERAL INFORMATION

- 1) A qualified electrician, in accordance with IEE wiring regulations, should carry out connection to mains wiring.
- 2) Electrical Class II luminaire.
- 3) Ensure that the rated voltage and frequency requirements are compatible with the available mains supply.
- 4) Cleaning of reflectors and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid.
- 5) Do not carry out high voltage insulation test, i.e. 500/1000v as this may damage the internal components.

Levanter

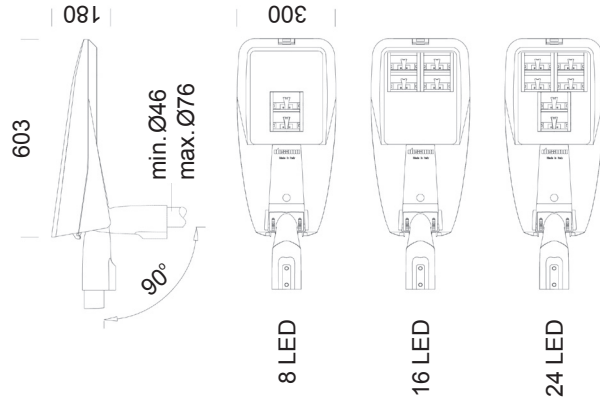

Levanter 2

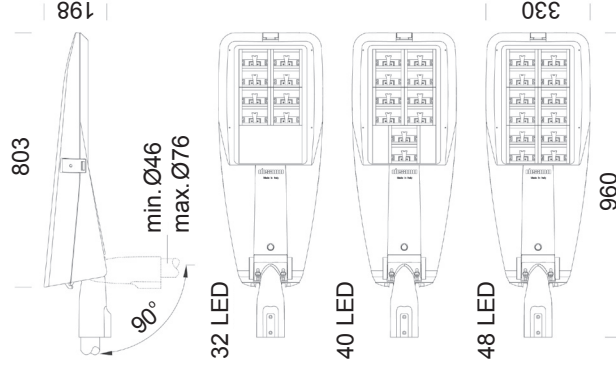

Levanter / Levanter 2 Post Top LED



Installation Instructions

PK/LEAF/LEVANTER



October 2017 - Rev D

Whitecroft Lighting Limited

Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX

Telephone: +44 (0)161 330 6811 Facsimile: +44 (0)161 331 5855

www.whitecrofflighting.com

Registered No. 3848973 England

Registered Office: As above

TECHNICAL SUPPORT

Tel: 0161 331 5700

E-mail: technical@whitecrofflight.com

www.whitecrofflighting.com

SPECIFICATION: LEVANTER & LEVANTER 2

Finish: Graphite grey or silver
Materials: Tempered glass / Aluminium
Supply: 220 - 240V AC, 50 - 60Hz

PHOTO CELL OPTION AVAILABLE

Operating Temp: -20 to 40°C
Connection: 1.5mm² input
Ingress Protection: IP66

UNIQUE TO LEVANTER

Power: Street Optics 4700 Lumens (41.9w)
 Street Optics 9401 Lumens (83.8w)
 Street Optics 14007 Lumens (125.7w)
 Street Optics 18801 Lumens (167.6w)
 Wide Street Optics 4669 Lumens (41.9w)
 Wide Street Optics 9337 Lumens (83.8w)
 Wide Street Optics 13980 Lumens (125.7w)
 Wide Street Optics 18640 Lumens (167.6w)
 Asymmetric 60 Degree 3045 Lumens (34.5w)
 Asymmetric 60 Degree 6130 Lumens (68.9w)
 Asymmetric 60 Degree 9395 Lumens (103.4w)
 Cycle Paths 3000 Lumens (35w)
 Cycle Paths 6000 Lumens (69w)
 Wide Flood Optics 2862 Lumens (34.5w)
 Wide Flood Optics 5725 Lumens (68.9w)
 Wide Flood Optics 8587 Lumens (103.4w)

IK Rating: 08

Weight: 7.20kg

UNIQUE TO LEVANTER 2

Power: Levanter 2, 19840 Lumens, Road Optics
 Levanter 2, 24800 Lumens, Road Optics
 Levanter 2, 29760 Lumens, Road Optics
 Levanter 2, 19707 Lumens, Wide Road Optics
 Levanter 2, 24633 Lumens, Wide Road Optics
 Levanter 2, 29560 Lumens, Wide Road Optics
 Levanter 2, 12260 Lumens, Asymmetric Optics
 Levanter 2, 15325 Lumens, Asymmetric Optics
 Levanter 2, 18390 Lumens, Asymmetric Optics
 Levanter 2, 11450 Lumens, Wide Flood Optics
 Levanter 2, 14312 Lumens, Wide Flood Optics
 Levanter 2, 17175 Lumens, Wide Flood Optics

IK Rating: 09

Weight: 11.0kg

